

2022

Product Catalog

Product Catalog



6402 Arlington Blvd.
Falls Church, VA 22042
Checkvideo.com



Product icon key



Device includes built-in intelligent video analytics.



Device produces a high definition (HD) video stream or is capable of processing HD video.



In addition to processing HD video streams, device is also capable of processing analytics data in HD.



Device has built-in video recording.



Device is IP-66 weatherproof.



Device includes matrix display output.



Device is capable of capturing video both day and night.



Device is capable of capturing video in low light.



Uses mobile / cellular communications for Internet connectivity.



Device is capable of panoramic views.



Device is capable of high density storage.



Device includes RAID 5 for increased reliability.



Device is capable of processing 4K video.

Information contained in this catalog is current as of the date of publication.
All specifications are subject to change without notice.
CheckVideo products are subject to US Government export laws. If required, export license must be received prior to shipment.

4 MEGAPIXEL INDOOR MICRO DOME CAMERA














Built-in speaker for live talk down (CV155A)

Built-in advanced video analytics

• Fixed focal 2.8mm lens

Built-in NVR. 30 days HD recording

• Person Detection up to 100 ft.

• 3 degrees of lens adjustment

• Low-light capable

• Power over Ethernet (PoE)

Requires CheckVideo Cloud VMS subscription

• Optional CheckVideo VoIP service for audio talk-down

MODEL CV155/CV155A

SKU 201149 (CV155)

SKU 201455 (CV155A)

Details and specifications

Pendant Mount Dome Camera Cap	174134	Purchased separately Requires 200581
CV15x/16x series wall mount	174178	Purchased separately
 4S Box Adapter	200484	Purchased separately Requires 200581
Adapter Plate	200581	Purchased separately
Compact Wall Mount	200582	Purchased separately Requires 200581

4 MEGAPIXEL OUTDOOR DOME CAMERA





Audio line output for connection to an amplified speaker (CV169A)

Built-in advanced video analytics

• 2.8mm-12mm motorized P-Iris lens, 82° (wide)to 33° (zoom)lens

Built-in NVR. 30 days HD recording

Person Detection up to 300 ft.

• Weatherproof IP 66 rating with on-board heater


Built-in IR illumination up to 100 ft.

Digital I/O interface for alarms and access panels

Purchased separately


Power over Ethernet (PoE)

174134



SKU 201638 (CV169M)

SKU 200560 (CV169A)



Details and specifications

Can detect person from 80 FT. to 300 FT. depending on zoom.

	Dome Camera Cap		
	CV15x/16x series wall mount	174178	Purchased separately
	4S Box Adapter	200484	Purchased separately
	Compact Wall Mount	200582	Purchased separately

Pendant Mount

4 MEGAPIXEL OUTDOOR BULLET CAMERA





Built-in advanced video analytics

2.8mm-12mm motorized P-Iris lens, 82° (wide)to 33° (zoom)lens

Built-in NVR. 30 days HD recording

Person Detection up to 300 ft.

Vehicle detection up to 500 ft.

Low-light capable

Digital I/O interface for alarms and access panels

Power over Ethernet (PoE)

Requires CheckVideo Cloud VMS subscription

MODEL CV138

SKU

Details and specifications

201251

















Can detect person from 80 FT. to 300 FT. depending on zoom.

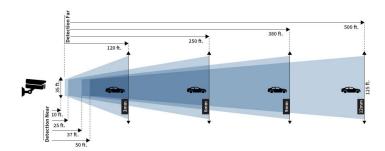


Can detect vehicle from 10 FT. to 500 FT. depending on zoom.

OUTDOOR PANORAMIC CAMERA



- One outdoor panoramic weatherproof IP camera
- Up to 9 megapixels dewarped
- 1/1.7" Progressive CMOS Sensor
- 360° ceiling mount, 180° wall mount or quad view
- Provides 100% circular coverage and person detection up to 100 feet (equivalent to 4 cameras)
- IP 66 weatherproof housing with built-in IR illumination
- Video Analytics
- Power over Ethernet (PoE)
- Requires CheckVideo Cloud VMS subscription











4S Box Adapter	200484	Purchased sepa- rately
CV15x/16x series wall mount	174178	Purchased separately (must purchase 201555 and 201556 to use the 174178 mount)

Compact Wall Mount	200582	Purchased separately
Mount Arm Adapter for L Style Cap	201555	Purchased separately
L Style Cap to Pelco Threaded Arm	201556	Purchased separately
25° Angled Wall Mount	201608	Purchased separately

Recorders HD Coax


EXPRESSHD RECORDER

DVR



Adds analytics and cloud backup to any coax camera





MODEL CVEHD-DVR

• 24x7 recording of video for up to 30 days

SKU 200785

Dry contact relay inputs or outputs to be connected to an alarm panel

Compatible with NTSC, AHD, and TVI cameras up to 4MP

HDMI output for a matrix display

Power supply included

Requires CheckVideo Cloud VMS subscription

Details and specifications



ExpressHD Outdoor IR Bullet Camera 2.8-12mm	201671	Purchased separately
ExpressHD Outdoor IR Mini-Dome Camera 2.8- 12mm	201579	Purchased separately
Rack Mount Kit-1.5U	201183	Purchased separately

EXPRESSHD OUTDOOR BULLET CAMERA













- 1/2.9" Progressive Scan CMOS
- 2.8-12mm Motorized Lens
- Full HD 1080P
- Video Transmission up to 700 ft.
- IR Up to 100 ft.
- 2D DNR, D-WDR, ICR
- Supports AHD/TVI/CVI/CVBS Output
- IP66
- Power supply not included
- DC12V/AC24V
- Requires CheckVideo ExpressHD

MODEL CVEHD-CAM-B-2 SKU 201671

EXPRESSHD OUTDOOR DOME CAMERA











- 1/2.8" Progressive Scan CMOS
- 2.8-12mm motorized lens
- Max 30fps@1080P
- Video Transmission up to 900 ft.
- IR up to 90 ft.
- 3D DNR, WDR, ICR, BLC, GLOBAL
- Support AHD/TVI/CVI/CVBS Output
- IP66, IK10
- Power supply not included
- DC12V/AC24V
- Requires CheckVideo ExpressHD

MOD- CVEHD-CAM-D-2

SKU 201579

CHECKVIDEO NVR 12TB



Expand edge recording for CheckVideo cameras



- 16-channel network video recorder for CheckVideo cameras
- Hard-drive records 16 cameras in 4MP for 30 days
- Used with CheckVideo cameras on the same network
- Includes power supply
- Requires CheckVideo Cloud VMS subscription

MODEL	CVNVR-12TB
SKU	201389

Details and specifications







HD VIDEO STORAGE SERVER







- HD Video Storage Server in a compact 1U rack mount chassis
- Capable of recording 32 channels of 4 megapixel video for 30 days
- Works with CheckVideo IP Cameras
- Available in capacities of 32TB and 48TB
- Four video-grade hard drives pre-configured with RAID 5 for increased reliability
- Requires CheckVideo Cloud VMS subscription

MODEL	CVNVR-SVR-32T
SKU	200663 (32T)
SKU	201637 (48T)

ANALYTICS NVR



Adds analytics and cloud backup to any IP camera















- One 16-channel analytics gateway and NVR recorder with 12TB hard drive
- Adds video analytics and continous video recording to ONVIF cameras
- Provides 24x7 video recording for 30 days
- View up to 16 live camera streams in a matrix view on a HDMI monitor and control PTZ cameras (monitor not included)
- Total capacity of 640 Megapixels/second, connect up to 16 4 Megapixel IP cameras or 6 4K cameras
- Digital I/O interface for alarms and access panels
- Includes analytics for person or vehicle detection up to 200 ft.
- Requires CheckVideo Cloud VMS subscription

MODEL	CV4IP-16-12T
SKU	201037

Details and specifications

CVN-VD410	200165	Purchased separately
Rack Mount Kit-1.5U	201183	Purchased separately

CHECKVIDEO ANALYTICS SERVER















- One 32-channel analytics gateway and NVR recorder
- Adds video analytics and continuous video recording to ONVIF cameras
- Provides 24x7 video recording for 30 days.
- View up to 32 live camera streams in a matrix view on a HDMI monitor (monitor not included).
- Available in capacities of 32TB and 48TB
- Matrix display output capability
- Works with up to **32 1080p cameras** (H.264 format)
- Includes SD analytics for person or vehicle detection up to 200 ft.
- Requires CheckVideo Cloud VMS subscription

MODEL CV4IP-SVR-32T
SKU 200666 (32T)
SKU 201636 (48T)

RUGGEDIZED MOBILE NVR



Adds analytics and cloud backup to any IP camera









- One 8-channel analytics gateway and NVR for IP cameras
- Adds video analytics and continuous video recording
- Provides 24x7 video recording for 7 days
- Built in 4G cellular communications
- Works with any ONVIF compliant H.264 camera
- **Built-in analytics processing** for detection ranges up to 400 ft.
- Suitable for extended temperatures
- Requires CheckVideo Cloud VMS subscription

MODEL	CV4IP-8-XT
SKU	201253 (without cellular)
MODEL	CV4IP-LTE
SKU	201192 (cellular service required)

Viewing Station


CHECKVIDEO VIEWING STATION





- CheckVideo Viewing Station local viewer for on-site cameras
- Live video from up to 36 CheckVideo cameras
- Remote Management and view configuration 2x2, 3x3, 4x4, 5x5 or 6x6 matrix view
- HDMI output capable of 1080p resolution
- Display wall support
- Power supply





<u>Details and specifications</u>

Mobile Solutions

MOBILE SENTRY





• Can be installed in virtually any outdoor or remote location

• Supports up to four IP cameras (not included)

• Includes advanced, self-adapting video analytics

• Built-in 4G cellular communications to enable instant video alerts to a central station or a mobile device

• Requires cellular data plan, sold separately

Includes battery backip and health monitoring

MODEL CMS4HD SKU 174193







Pole mount for CMS4HD enclosure	174257	Optional
Solar power	200701	Optional
External high-gain antenna	174129	Optional
Pole Mount for Camera	200366	Optional

CHECKVIDEO CLOUD VMS

Subscription Tiers



	Cloud VMS Premier	Cloud VMS Central	Cloud VMS Professional	Cloud VMS Enterprise
Unlimited Users	√	√	√	√
Unlimited Locations	√	√	√	√
Software License for Cloud VMS	√	√	√	√
Software Updates	√	√	√	√
System Health Reporting	√	√	√	√
Video Search Engine	√	√	√	√
Video Analytics Person and Vehicle Detection	√	√	√	√
Cloud Analytics for False Alarm Mitigation			√	√
Central Station Interface		✓	✓	√
Custom Analytics: Timelapse, Heatmap, Counting				✓
Cloud Backup	5 Days	5 Days	14 Days	31 Days
Additional Cloud Backup				Add-on option 2 months-2 years
Plus Subscription (Adds unlimited remote streaming of live or DVR event video)	with plus subscription add-on	with plus subscription add-on	√	√

All use of hosted services is subject to the terms and conditions available at www.checkvideo.com/terms-conditions.

Options & Accessories

	PRODUCT	MODEL
	BULLET 2MP CAMERA - EXPRESSHD One 2MP color camera with 2.8-12mm motorized varifocal lens, auto-focus, IP-66 rated, IR illumination, DC12V/AC24V.	201671
	DOME CAMERA - EXPRESSHD One 2MP color camera with 2.8-12mm motorized varifocal lens, auto-focus, IP-66 rated, IR illumination, DC12V/AC24V.	201579
	POLE MOUNT FOR CMS4HD ENCLOSURE One CheckVideo pole mount with steel cables for CMS4HD.	174257
	EXTERNAL HIGH-GAIN ANTENNA One external multi-band magnetic mount antenna with a frequency range of 694-894 MHz & 1700-2700 MHz and 3dB-MEG gain. For CMS4HD.	174129
	CV15x / CV16x SERIES WALL MOUNT One white wall mount with Pelco thread to attach to dome camera cap. For CV155, CV169. Requires CV155 adapter plate.	174178
	4S BOX ADAPTER One mounting plate for 4S electrical box. Use with CV155, CV169. Requires CV155 adapter plate.	200484
	ADAPTER PLATE Required to use CV154 with mounting hardware such as dome cap, arm or 4S box adapter.	200581
	PENDANT MOUNT DOME CAMERA CAP One camera cap with Pelco thread for use with wall or pendant mount. Use with CV155, CV169. Requires CV155 adapter plate.	174134
	COMPACT WALL MOUNT For indoor installation with dome cameras. Use with CV155, CV169. Requires CV155 adapter plate.	200582
	POLE MOUNT FOR CAMERA One pole mount bracket for cameras. Requires wall mount and cap for dome cameras. Use with junction box for bullet cameras.	200366
	RACK MOUNT KIT-1.5U One rack mount kit. For use with CV4IP-16-8T and CVEHD-DVR.	201183
	CVN-VD410 One 4MP IP Varifocal Dome Camera. For use with CV4IP-16-8T.	201165
5	WALL MOUNT BRACKET - 4MP IP Varifocal Dome Camera One wall mount bracket for the 4MP IP Varifocal Dome Camera (CVN-VD410).	201581
	JUNCTION BOX - 4MP IP Varifocal Dome Camera One junction box for the 4MP IP Varifocal Dome Camera (CVN-VD410).	201580
	Mount Arm Adapter Mount Arm Adapter for L Style Cap. For use with CV182 and 174178 wall mount.	201555
0	L Style Cap One L Style Cap to Pelco Threaded Arm. For use with CV182 and 174178 wall mount	201556
	25° Angled Wall Mount One 25° Angled Wall Mount. For use with CV182	201608
	Solar power For use with Mobile Sentry CMS4HD	200701

